

HEIGHTS	Billieriolorio (Approximate Value)		
00000000000000000000000000000000000000		m	ft
	А	2.5	8.2
	В	2.4	7.9
	С	1.2	3.9
	D	4.7	15.4
	E	0.9	2.9
Note£°Point D is located at the midpoint of the nose landing gear and the main landing gear.	F	2.4	7.9
	G	1.2	3.9
	Н	1.9	6.2
	I	1.4	4.6
	J	4.6	15.1
	K	8.6	28.2
	L	8.0	26.2
	M	8.1	26.6
	N	3.4	11.2
	* The dimension refers to the height in the operational empty weight		

condition.

NOTE
This chart shows the layout of ARJ21-700 standard configuration.
The number or mounted location of some items may be different depending on aircraft configuration.
The equipment illustrated in black is installed below the floor.

Publication: 2023.09.20

Effectivity: 105-108,111,113-185, 187-191,193-222,224, 225,10126,10128, 10132-10134, 10150-19999

GENERAL VIEW OF EVACUATION PATH

Escape Rope

(Through Sliding Window)

Emergency

Evacuation

EMERGENCY DOOR HANDLE

CAUTION: THE SLIDES OF THE EMERGENCY EXIT DOORS

2. Rotate the handle to the UNLOCKED position along the arrow.

3. Pull the door backwards to the position of gust lock.

PUSH POINT

1. Push the door handle to lift it.

MUST BE ALWAYS IN ARMED STATUS.

Operating Procedures


FWD


LŐČKED


EXTERNAL

HANDLE

ARJ21-700 Crash Crew Chart

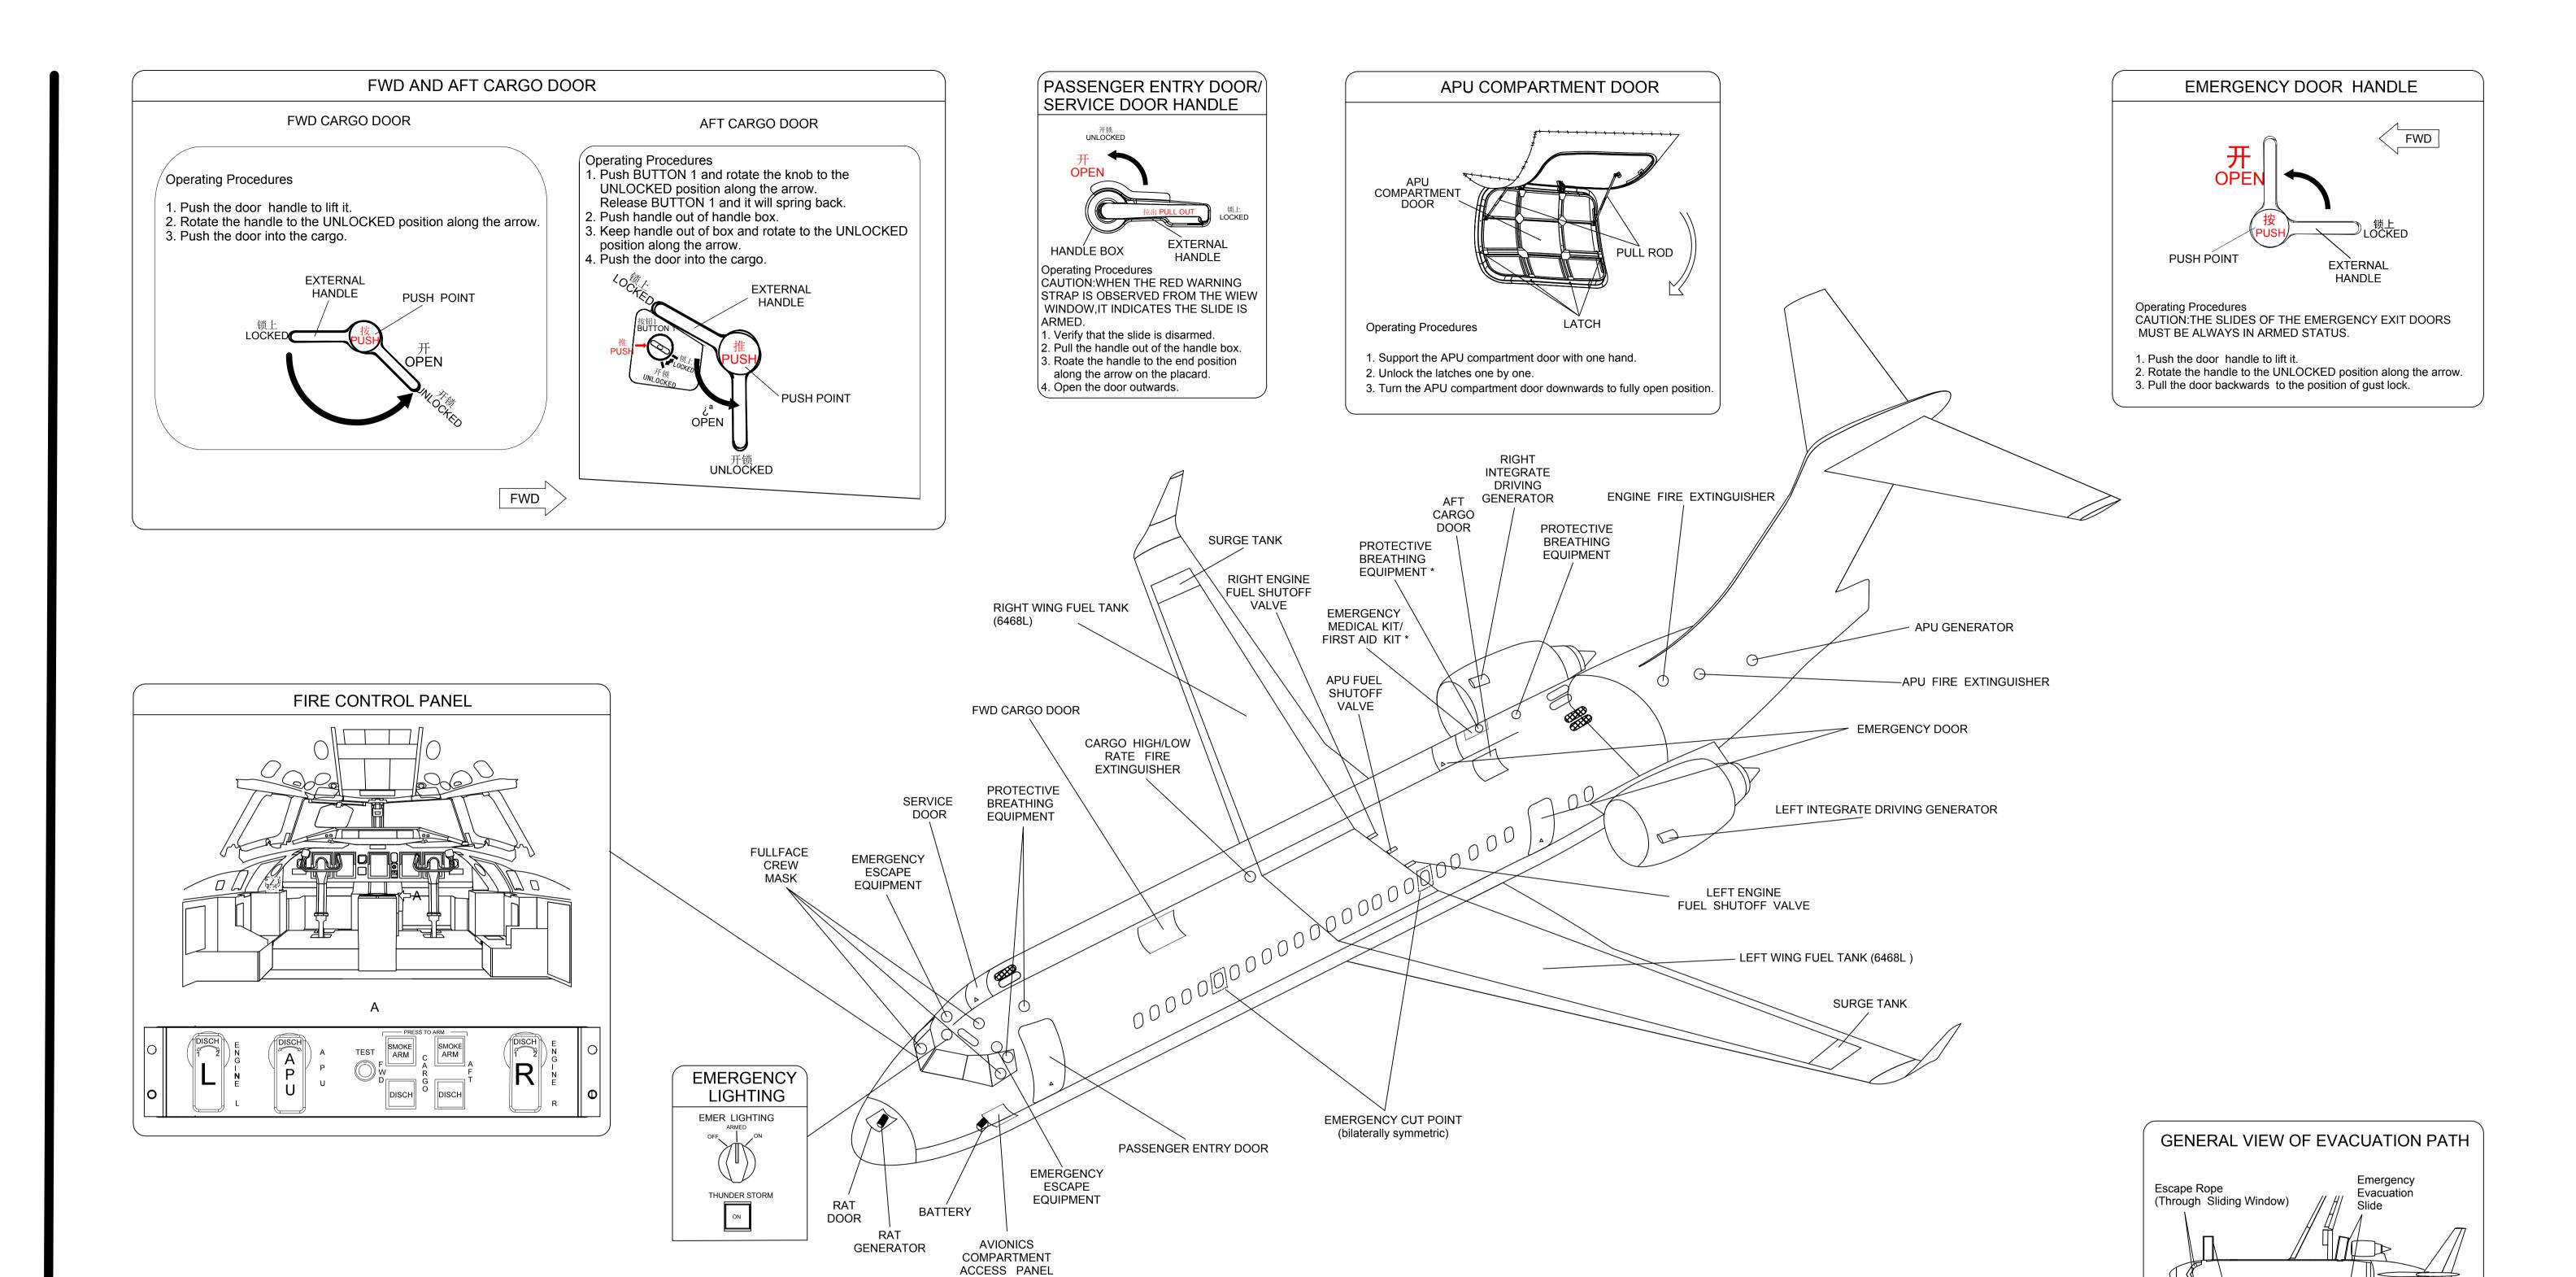

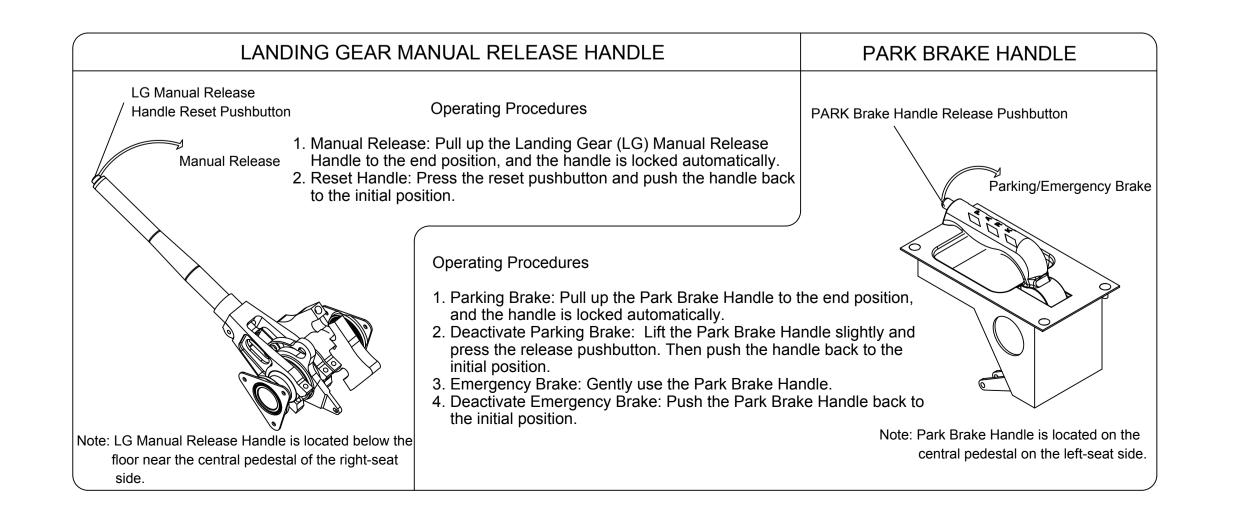

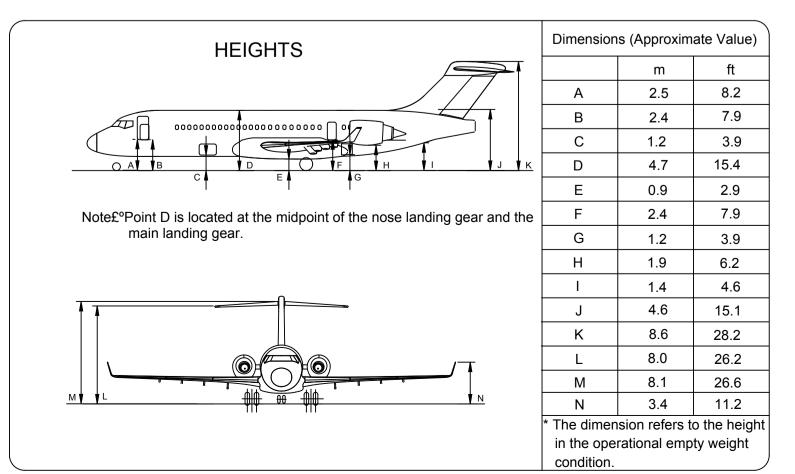

APPROACH LANDING GEAR TRUCK Portable Fire Extinguisher FROM FWD OR AFT WHEN FIGHTING Portable Oxygen Cylinder A WHEEL FIRE, AS WHEELS AND TIRES Nitrogen Cylinder (Evacuation Slide) MAY EXPLODE. Installed in Stowage Bin Publication: 2023.09.20 This chart shows the layout of ARJ21-700 standard configuration. The number or mounted location of some items may be different depending on aircraft configuration.


Effectivity: 223,10127,10130, 10131.10135-10149

The equipment illustrated in black is installed below

Emergency Evacuation Slide

ARJ21-700 Crash Crew Chart

10131,10135-10149

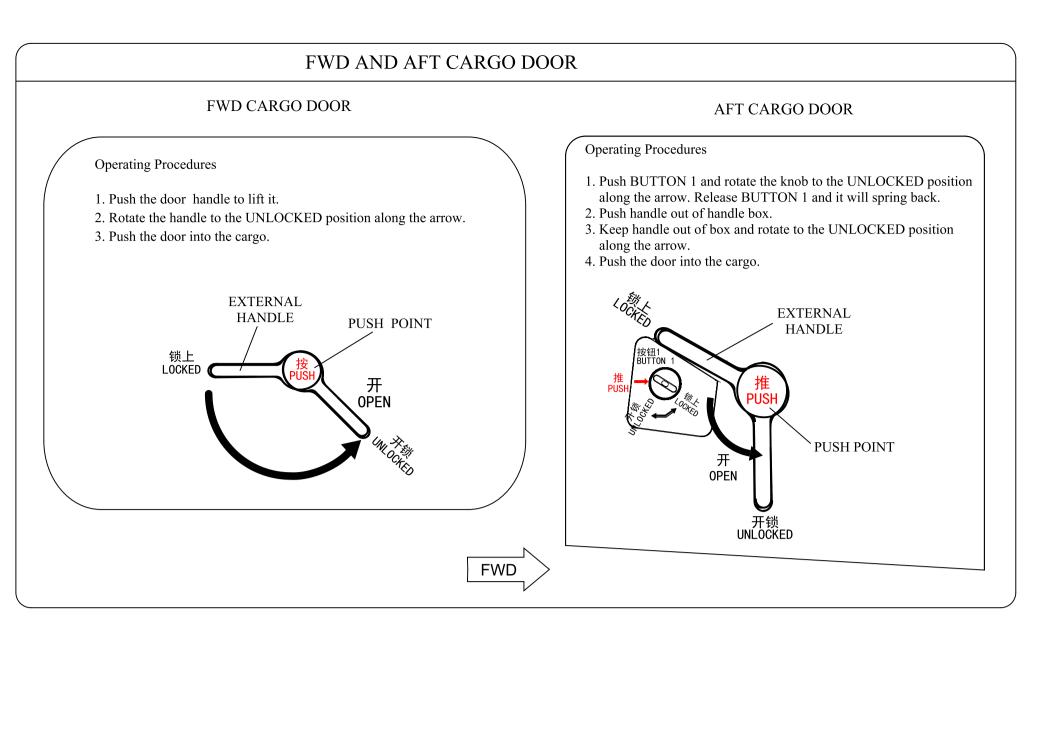

FULLFACE

CREW

MASK

EMERGENCY

LIGHTING

EMER LIGHTING

THUNDER STORM

RAT DOOR

RAT

GENERATOR

AVIONICS COMPARTMENT


ACCESS PANEL


EMERGENCY


ESCAPE


EQUIPMENT

FIRE CONTROL PANEL

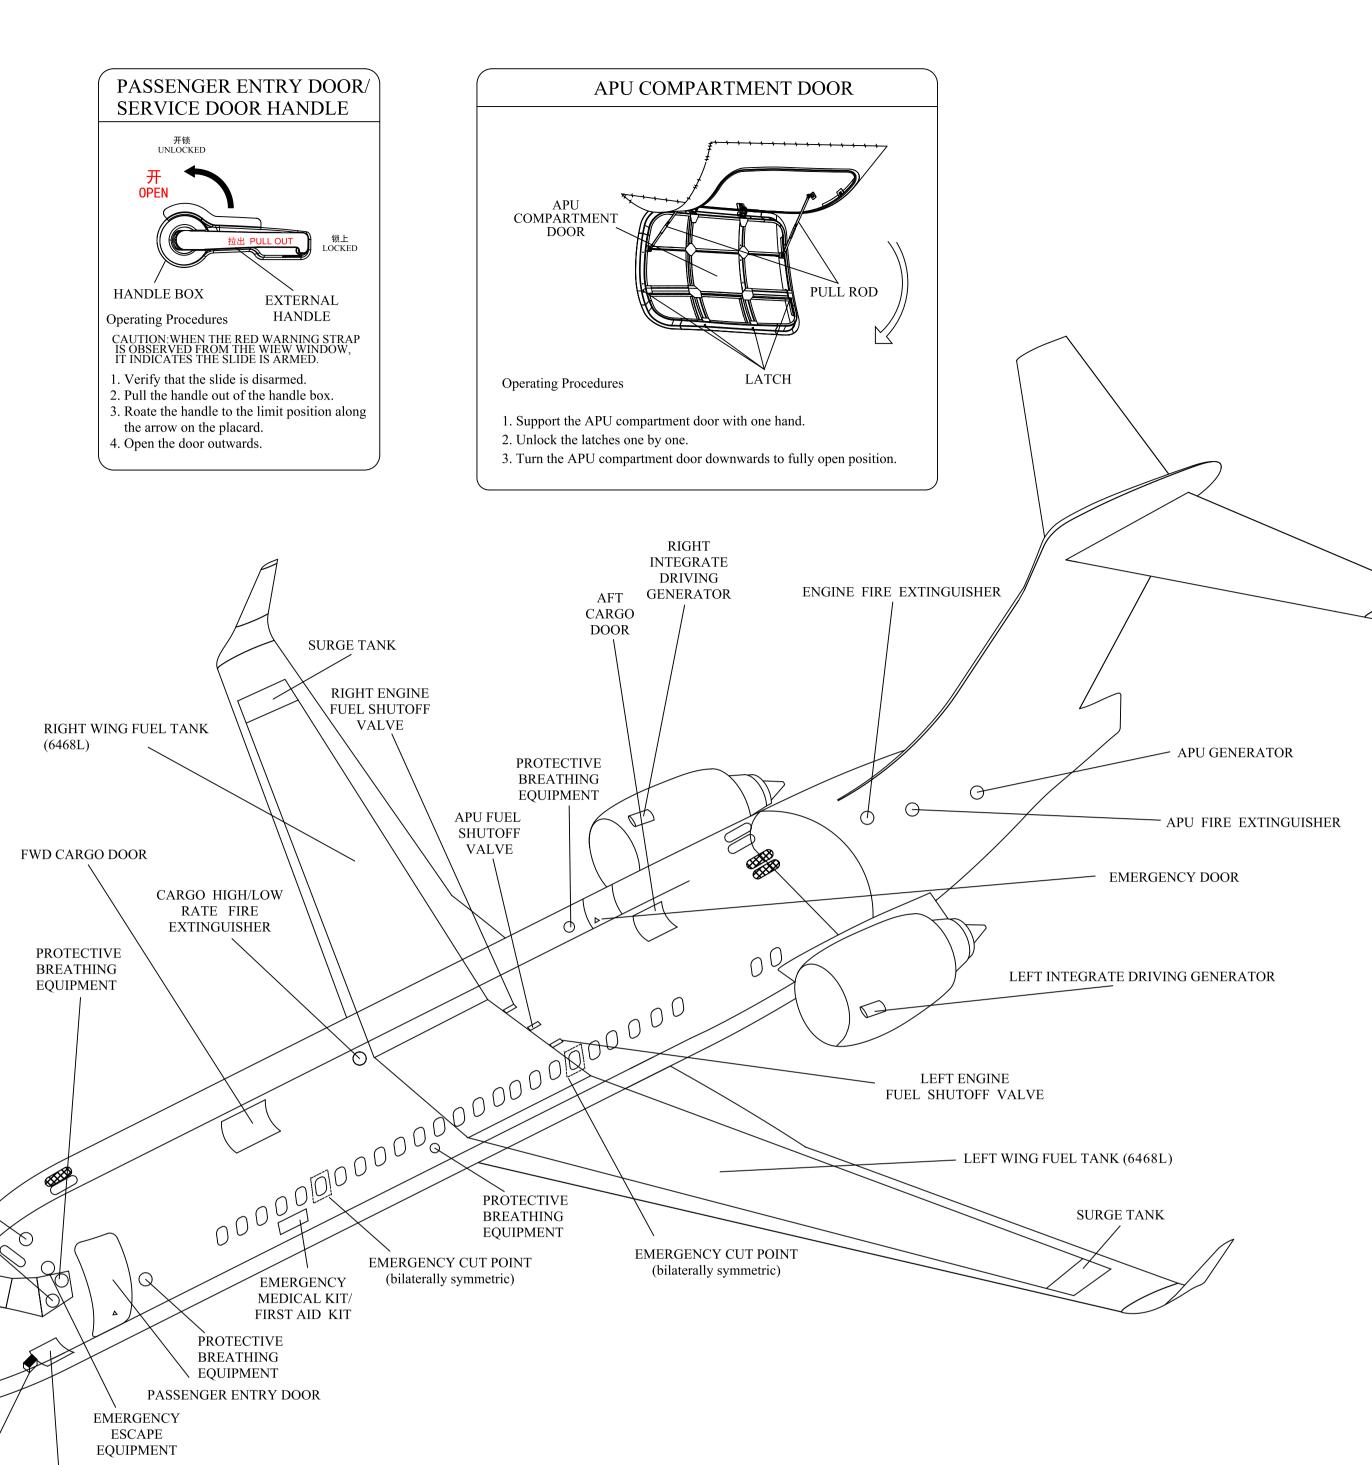

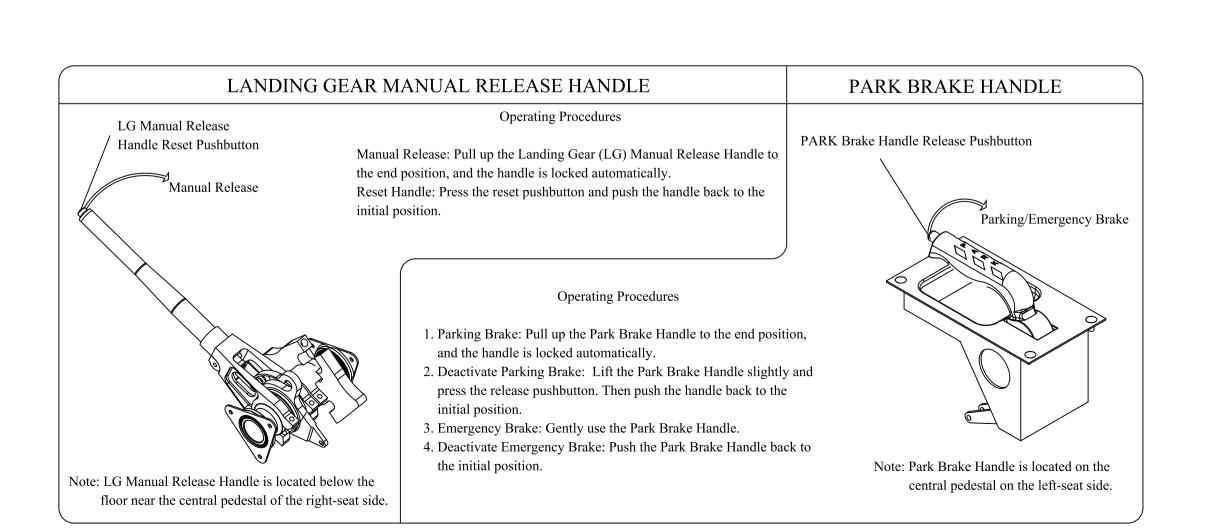

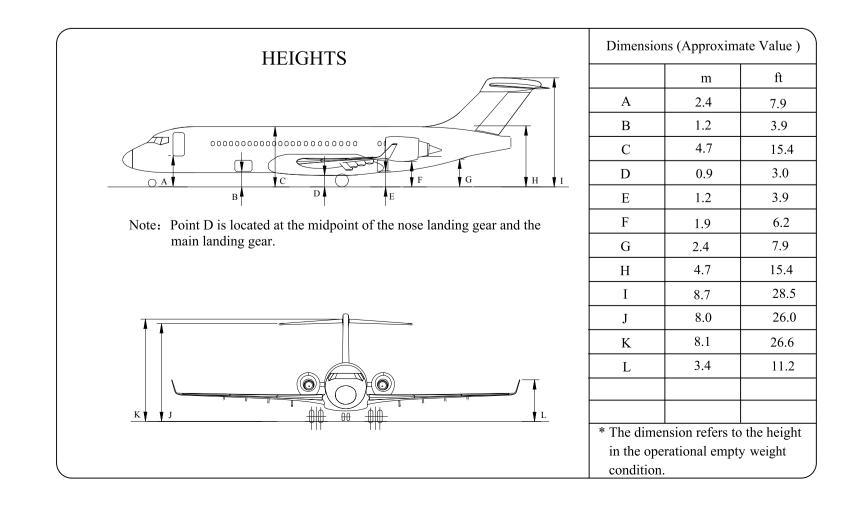

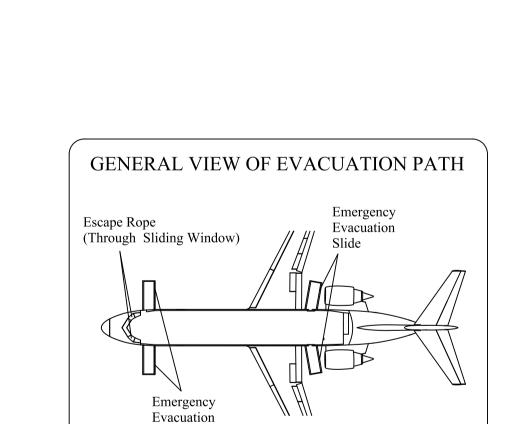

EMERGENCY DOOR HANDLE

开锁 UNLOCKED

CAUTION: THE SLIDES OF THE EMERGENCY EXIT DOORS MUST BE ALWAYS IN ARMED STATUS.

2. Rotate the handle to the UNLOCKED position along the arrow.

3. Pull the door backwards to the position of gust lock.

EXTERNAL

1. Push the door handle to lift it.


HANDLE

Operating Procedures

OPEN

PUSH POINT

FWD



Portable Fire Extinguisher

Portable Oxygen Cylinder

Nitrogen Cylinder (Evacuation Slide)

NOTE
This chart shows the layout of ARJ21-700 business jet configuration.


The number or mounted location of some items may be different depending on aircraft configuration.

The equipment illustrated in black is installed below the floor.

Date: 2023.03.20 Effectivity: 110

ARJ21-700 Crash Crew Chart

Slide

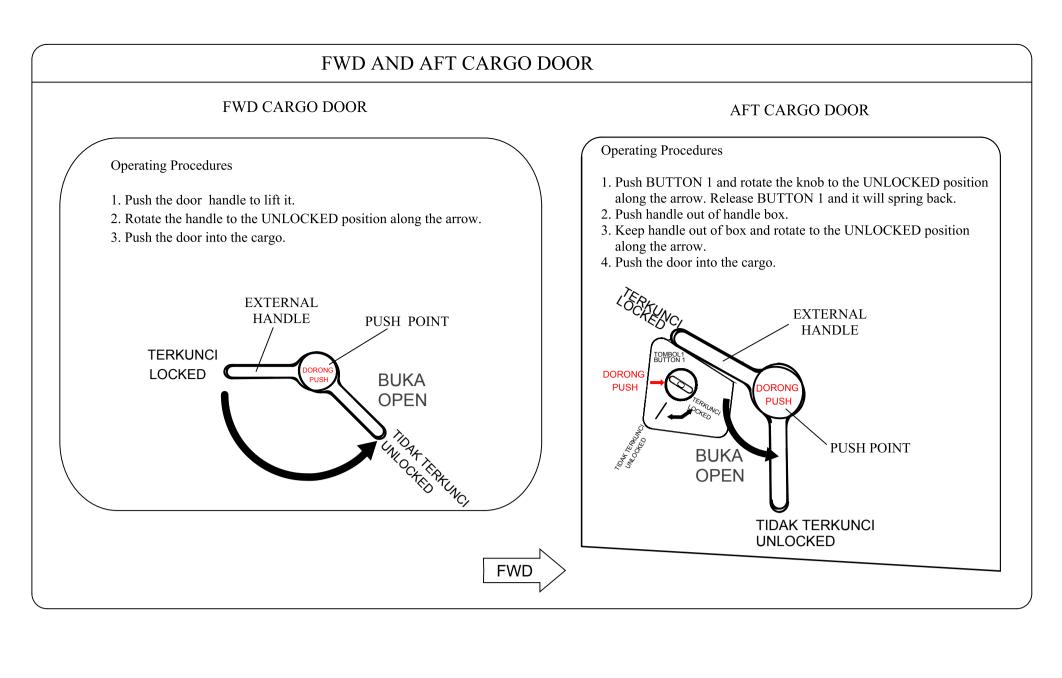

SERVICE

DOOR

EMERGENCY

ESCAPE

EQUIPMENT

PROTECTIVE BREATHING EQUIPMENT

RAT DOOR

RAT GENERATOR

AVIONICS COMPARTMENT ACCESS PANEL

FULLFACE

CREW


MASK


EMERGENCY LIGHTING


EMER LIGHTING


THUNDER STORM

FIRE CONTROL PANEL

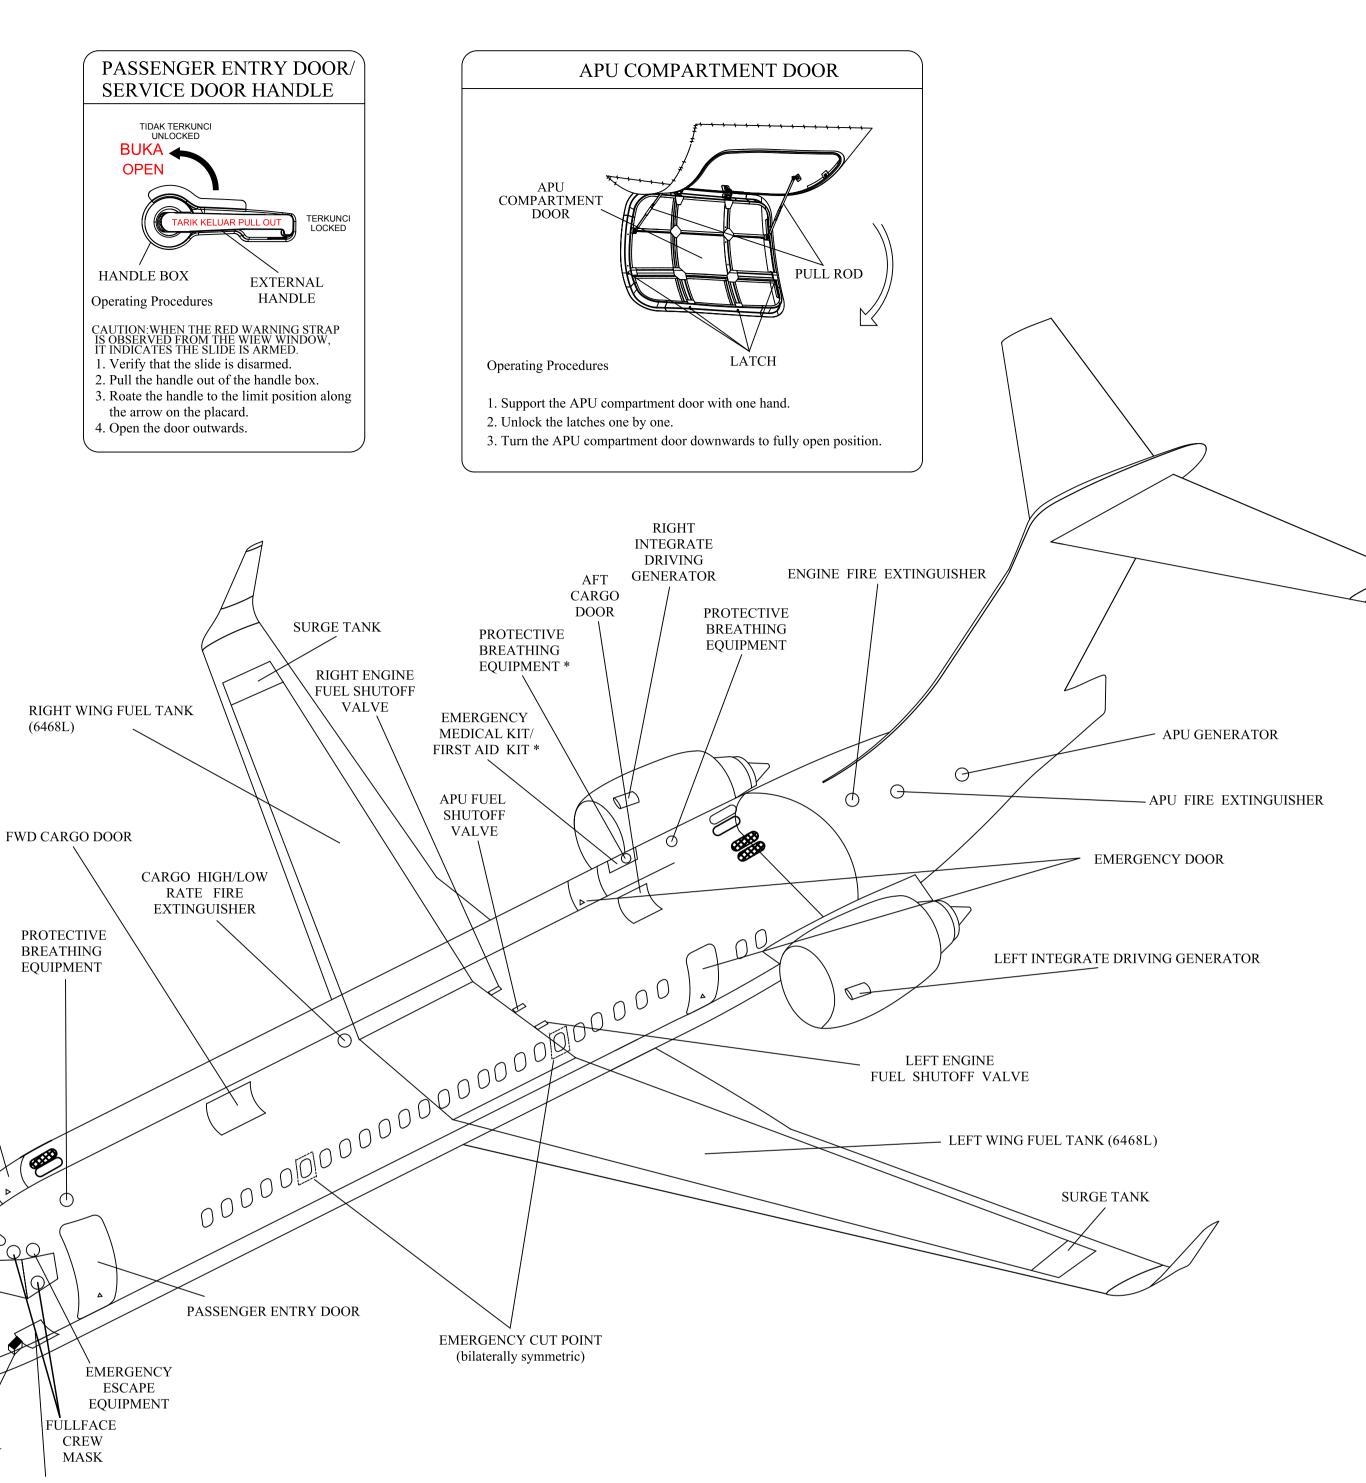

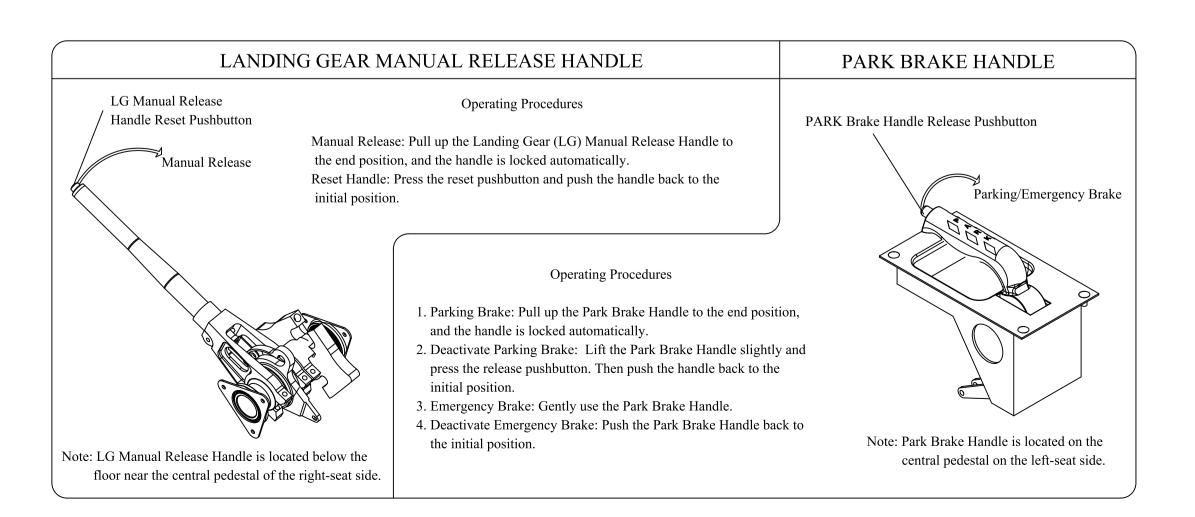

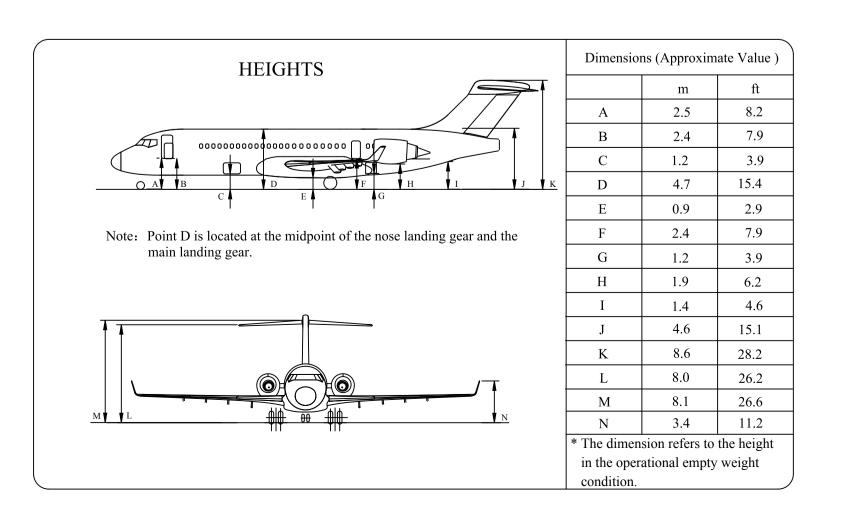

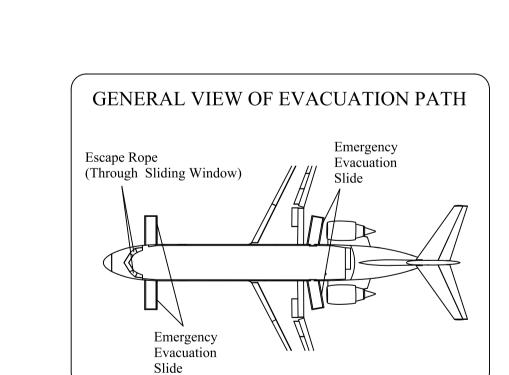

EMERGENCY DOOR HANDLE

CAUTION: THE SLIDES OF THE EMERGENCY EXIT DOORS MUST BE ALWAYS IN ARMED STATUS.

2. Rotate the handle to the UNLOCKED position along the arrow.

3. Pull the door backwards to the position of gust lock.

FWD

TERKUNCI

LOCKED

EXTERNAL

HANDLE


TIDAK TERKUNCI

UNLOCKED

PUSH POINT

Operating Procedures

1. Push the door handle to lift it.



Portable Fire Extinguisher Portable Oxygen Cylinder Nitrogen Cylinder (Evacuation Slide) * Installed in Stowage Bin

This chart shows the layout of ARJ21-700 standard configuration.

The number or mounted location of some items may be different depending on aircraft configuration.

The equipment illustrated in black is installed below

Date: 2023.09.20

Effectivity: 186,192,10129

ARJ21-700 Crash Crew Chart

